

# Communication Convention Formation in Large Multiagent Systems

## (Doctoral Consortium)

Mohammad Rashedul Hasan  
University of North Carolina at Charlotte  
Charlotte, NC 28223, USA  
mhasan8@uncc.edu

### ABSTRACT

A fundamental challenge in large-scale multiagent systems (MAS) is to enhance network-related dynamical processes such as establishing social convention in a decentralized fashion by regulating the behavior of the artificial autonomous agents. In my dissertation, I plan to study the specific problem of communication convention formation as a dynamic semiotic process over a large-scale MAS. In a semiotic process, a group of artificial agents collectively invent and negotiate about a shared language system that is used for communication. The landscape of the communication system will be captured through a hierarchy of interdependent networks where a semiotic network is built on top of an agent network. I propose a network theoretic investigation to determine its implications on the dynamic convention formation process and plan to develop a generalized theory of communication convention suitable for large-scale networked MAS. This theory will support predictions of system properties such as convergence dynamics across different temporal regions. Finally, an effective convention formation mechanism based on the generalized theory will be presented and evaluated for a real-world application domain.

### Categories and Subject Descriptors

I.2.11 [Distributed Artificial Intelligence]: *Multiagent Systems*

### Keywords

Communication Convention; Language Coordination; Semiotic Network; Network Dynamics; Multiagent Learning

## 1. INTRODUCTION

Coordination of agent activities in large multiagent systems (MAS) is central to cooperatively achieving goals. A social convention is considered to be a technique for increasing coordination [10]. It helps to reduce the overhead of coordination by simplifying agents' decision-making process through the determination of action choices. Therefore, establishing a social convention acts as a useful mechanism for deciding the dominant coordination strategy or building

**Appears in:** *Alessio Lomuscio, Paul Scerri, Ana Bazzan, and Michael Huhns (eds.), Proceedings of the 13th International Conference on Autonomous Agents and Multiagent Systems (AAMAS 2014), May 5-9, 2014, Paris, France.*  
Copyright © 2014, International Foundation for Autonomous Agents and Multiagent Systems (www.ifaamas.org). All rights reserved.

consensus in MAS. For example, the mechanism for predicting conventions in online communities (such as in Twitter) could be useful for understanding various socio-political phenomena [6].

In my dissertation, I plan to study the problem of convention formation in the context of a dynamic semiotic process [9]. In this process a group of human or artificial agents collectively invent and negotiate a shared language system or a semiotic system to establish a *communication convention*. When the agents are situated in a networked society, it is important to ask how they self-organize a communication system or create a communication convention that enable them to share a common lexicon? Agents in networked MAS form triadic relationship between the objects, words and associated meanings for every object that they want to describe. However, due to un-coordinated language acquisition process, agents may use different words to describe the same object (synonymy). It is also possible that one word may refer to multiple meanings (ambiguity) or multiple objects (homonymy). The challenge, therefore, is to reduce or dampen synonymy, homonymy and ambiguity through a coordinated language learning process such that a communication convention emerge in the MAS. My research goal is to design a theoretical framework to investigate this process carefully and to design mechanisms that ensure the emergence of an *effective* (each agent shares the same language), but also *efficient* (using less resource, e.g., small memory-size) communication convention.

## 2. APPROACH

A communication convention problem requires to define (i) a semiotic landscape containing the relationship among the objects, words and associated meanings and (ii) an interaction network model for the agent society. The semiotic landscape is defined by semiotic networks that represents the relationship between the objects, words and the associated meanings. In this type of network nodes are formed by the objects, words and meanings. Two nodes share an edge if the items associated with the nodes co-occur.

A population of agents are situated on the nodes of an undirected dynamic graph. Each agent has a limited computational power and limited memory. The interactions among the agents are captured through various games. At each time step, agents update their state (among a certain set of possible states) according to the state update rules through interactions with their neighbors. The dynamics at the agent state level influences the dynamics of the semiotic network.

Tools of statistical physics will be used to investigate how the agent network dynamics affects the dynamics of the semiotic network.

A **solution** to the communication convention problem will be composed of a set of state update rules and agent architecture. I will design the state update rules based on empirical investigation of the convention process over various agent network models. The results obtained from these investigations will also be used to design the agent architecture.

The intended generalized theory of communication convention would be developed based on a comprehensive experimentation of various network models, convention domains, agent architectures and state update rules. Following is a short list of the model parameters that will be used to perform the investigation:

**Variation of the Agent Network Models:** Previous studies on shared language problem have used standard models of complex networks such as Barabasi-Albert Scale-free and Watts-Strogatz Small-world network models [1]. These models assume that new nodes have access to information about the global state of the network. In many realistic scenarios this assumption does not hold. Therefore, I will use realistic complex network models such as local-world evolving network [7], fitness-based network [2] models and their variants.


**Variation of the Agent Interaction Models:** Typically agent interactions are modeled by using various games. I will augment the existing models and investigate their impact on the performance of my approach.

**Variation of Agent Architecture:** I will investigate the variation of the following components of the agent architecture: effect of memory size, neighbor selection strategy, negotiation models and agent learning.

### 3. PRELIMINARY RESULTS

I have designed a mechanism that is able to create a social convention within a large convention space for MAS operating on dynamic SF networks [5]. The language coordination problem from [3, 8] is used for investigation in which a society of agents construct a common lexicon in a decentralized fashion (these two approaches are referred as FGJ and SRA respectively). Agents' interactions are modeled using a language game in which agents send lexicons to their neighbors and update their lexicon based on the utility values of the received lexicons. I proposed a novel topology-aware (TA) utility computation mechanism and enable the agents to reorganize their neighborhood based on this utility estimate to expedite the convention formation process. Figure 1 compares how dominant convention agents evolve over time for three variants of TA with SRA and FGJ. Results indicate that the proposed mechanism is both **effective** (able to converge into a large majority convention state with more than 90% agents sharing a high-quality lexicon) and **efficient** (faster) as compared to the state-of-the-art SRA and FGJ.

Currently I am investigating this lexicon convention problem over various network topologies including small-world, local-world and random networks. The agents will be able to predict the topology of their local neighborhood and use an appropriate convention formation mechanism. Previously I developed this type of topology-aware convention selection mechanism for a small convention space [4].

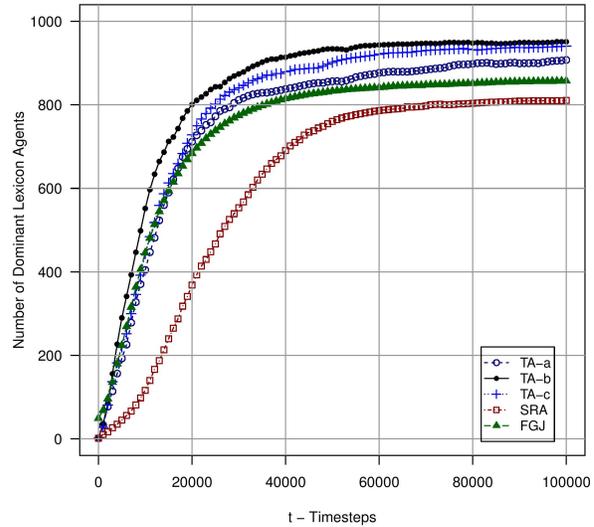

**Figure 1: Comparison of the number of dominant lexicon agents for three variants of the topology-aware (TA) approach with SRA and FGJ's approach.**

### 4. REFERENCES

- [1] A. Baronchelli, M. Felici, E. Caglioti, V. Loreto, and L. Steels. Sharp transition towards shared vocabularies in multi-agent systems. *J. Stat. Mech.*, (P06014), 2006.
- [2] G. Bianconi and A.-L. Barabási. Bose-einstein condensation in complex networks. *Phys. Rev. Lett.*, 86:5632–5635, Jun 2001.
- [3] H. Franks, N. Griffiths, and A. Jhumka. Manipulating convention emergence using influencer agents. *Autonomous Agents and Multi-Agent Systems*, 26(3):315–353, May 2013.
- [4] M. R. Hasan, S. Abdallah, and A. Raja. Topology aware convention emergence. In *AAMAS '14*, 2014. (to appear).
- [5] M. R. Hasan and A. Raja. Fast convention formation in dynamic networks using topological knowledge. Technical Report DAIR-2014-001, 2014.
- [6] F. Kooti, W. A. Mason, P. K. Gummadi, and M. Cha. Predicting emerging social conventions in online social networks. In X. wen Chen, G. Lebanon, H. Wang, and M. J. Zaki, editors, *CIKM*, pages 445–454. ACM, 2012.
- [7] X. Li and G. Chen. A local-world evolving network model. *Physica A: Statistical Mechanics and its Applications*, 328(1-2):274–286, Oct. 2003.
- [8] N. Salazar, J. A. Rodriguez-Aguilar, and J. L. Arcos. Robust coordination in large convention spaces. *AI Commun.*, 23(4):357–372, Dec. 2010.
- [9] L. Steels and F. Kaplan. Bootstrapping grounded word semantics. In T. Briscoe, editor, *Linguistic evolution through language acquisition: formal and computational models*, pages 53–74. Cambridge University Press, Cambridge, UK, 2002.
- [10] T. Sugawara. Emergence and stability of social conventions in conflict situations. In T. Walsh, editor, *IJCAI*, pages 371–378. IJCAI/AAAI, 2011.